


┌

**FIG. 1**

100

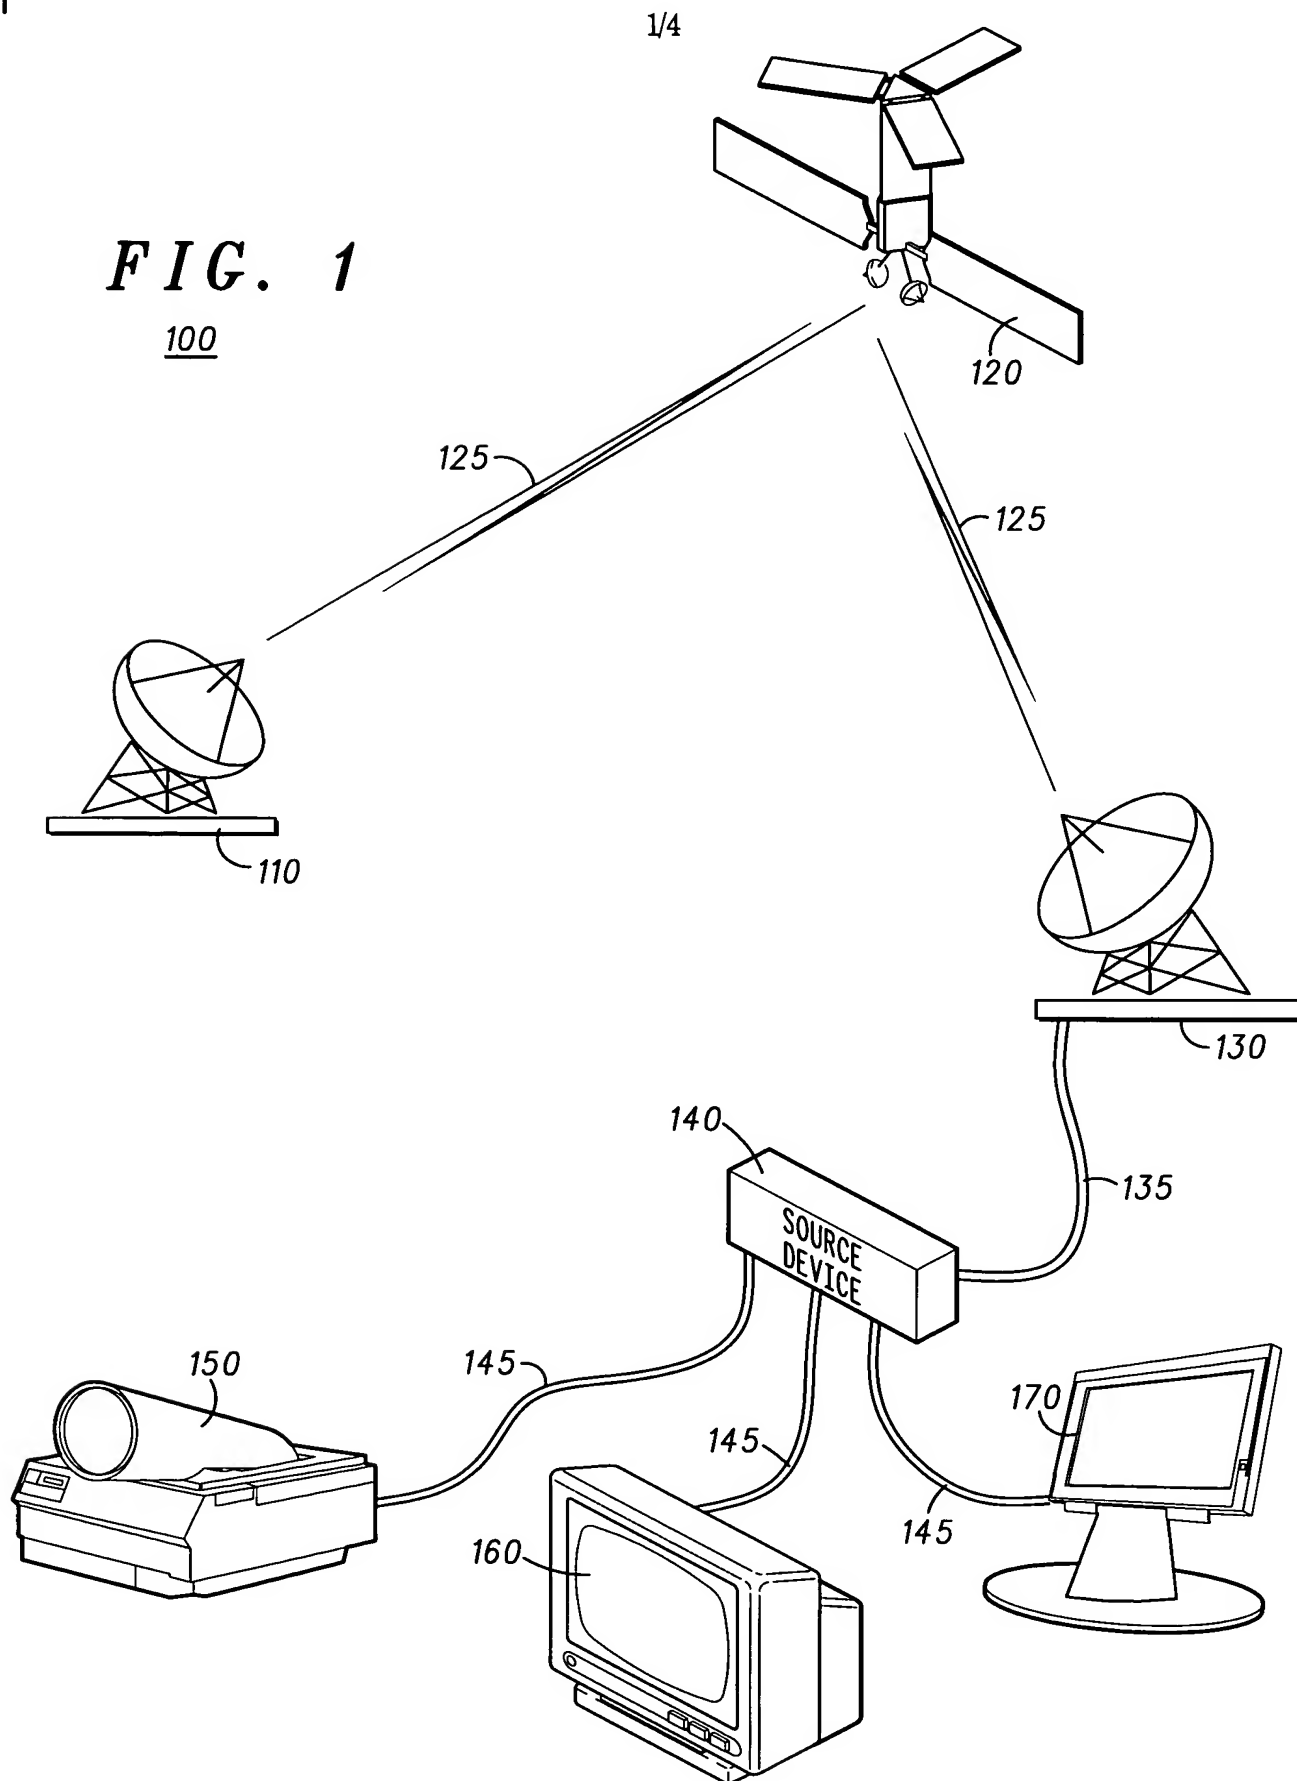

└


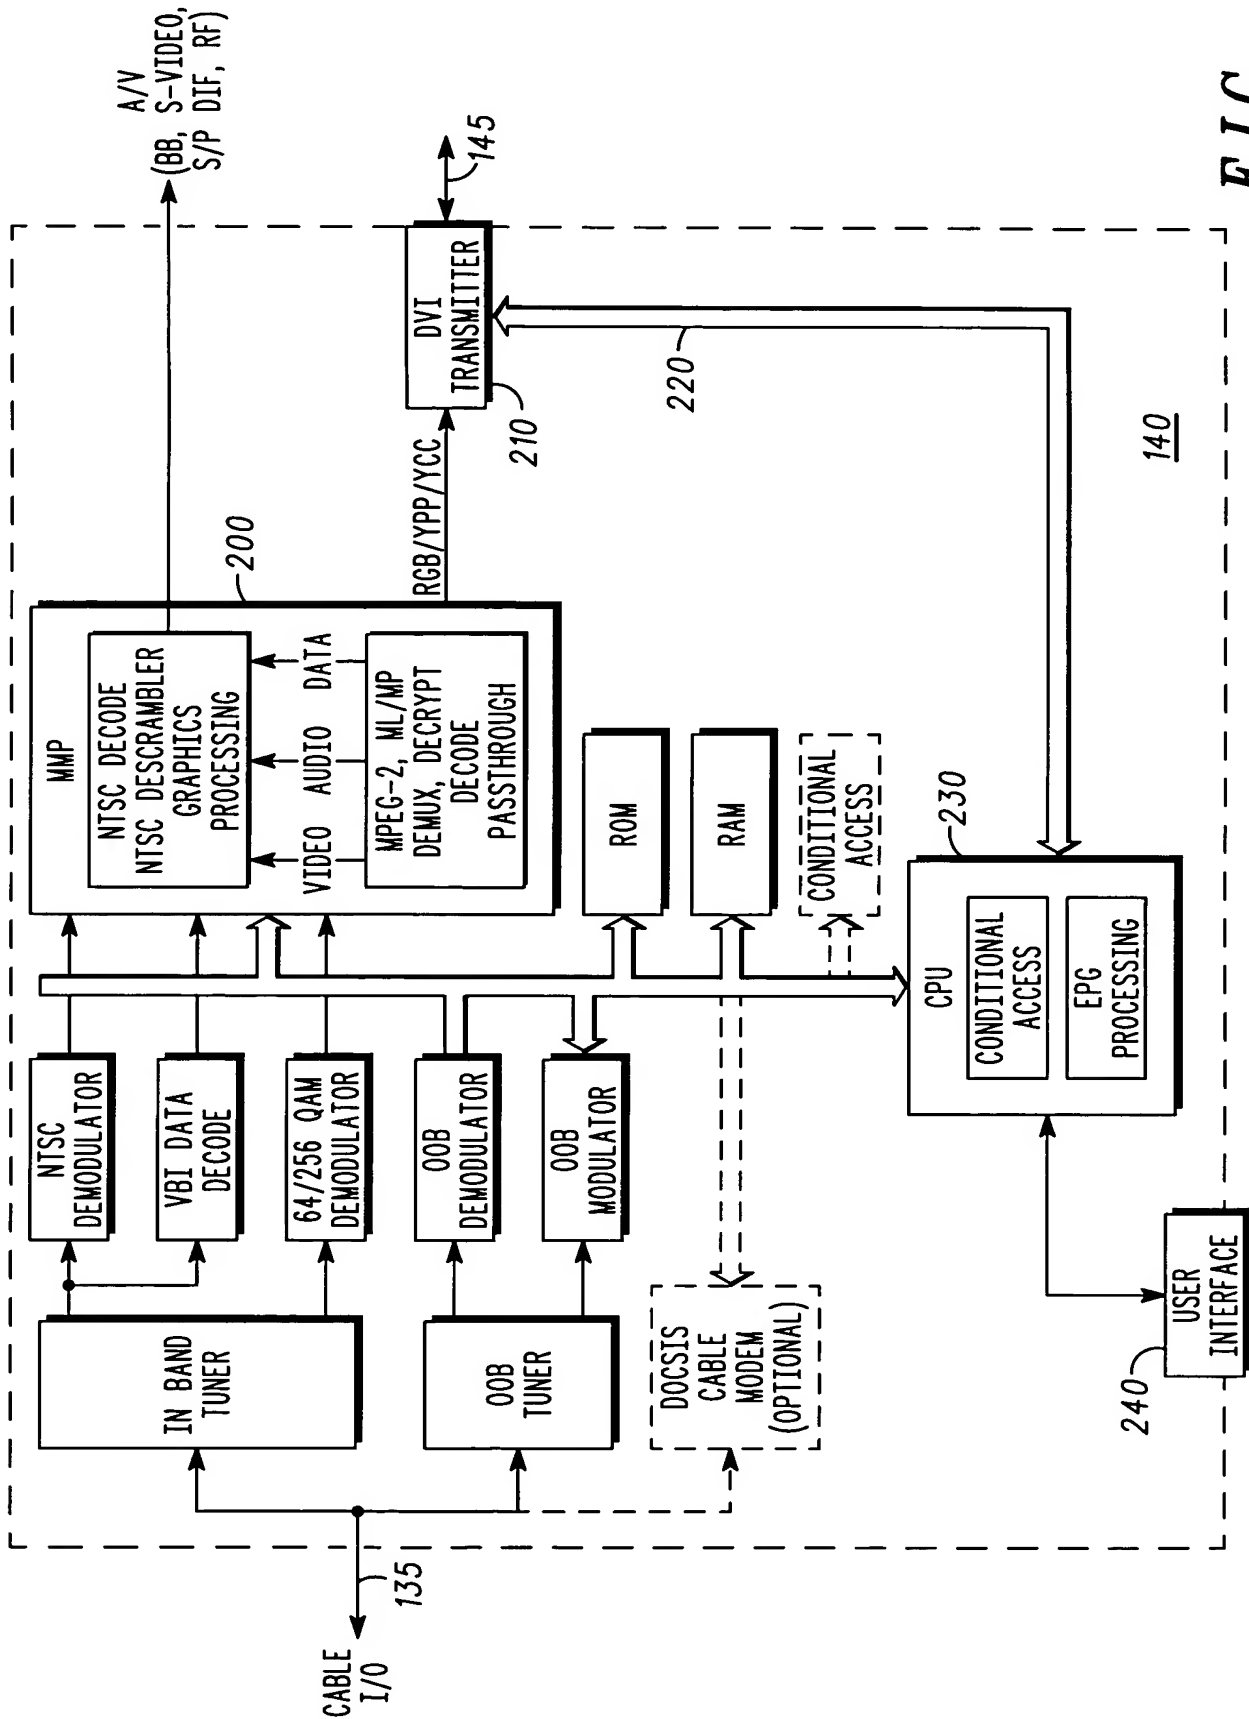



FIG. 2

3/4

**FIG. 3**

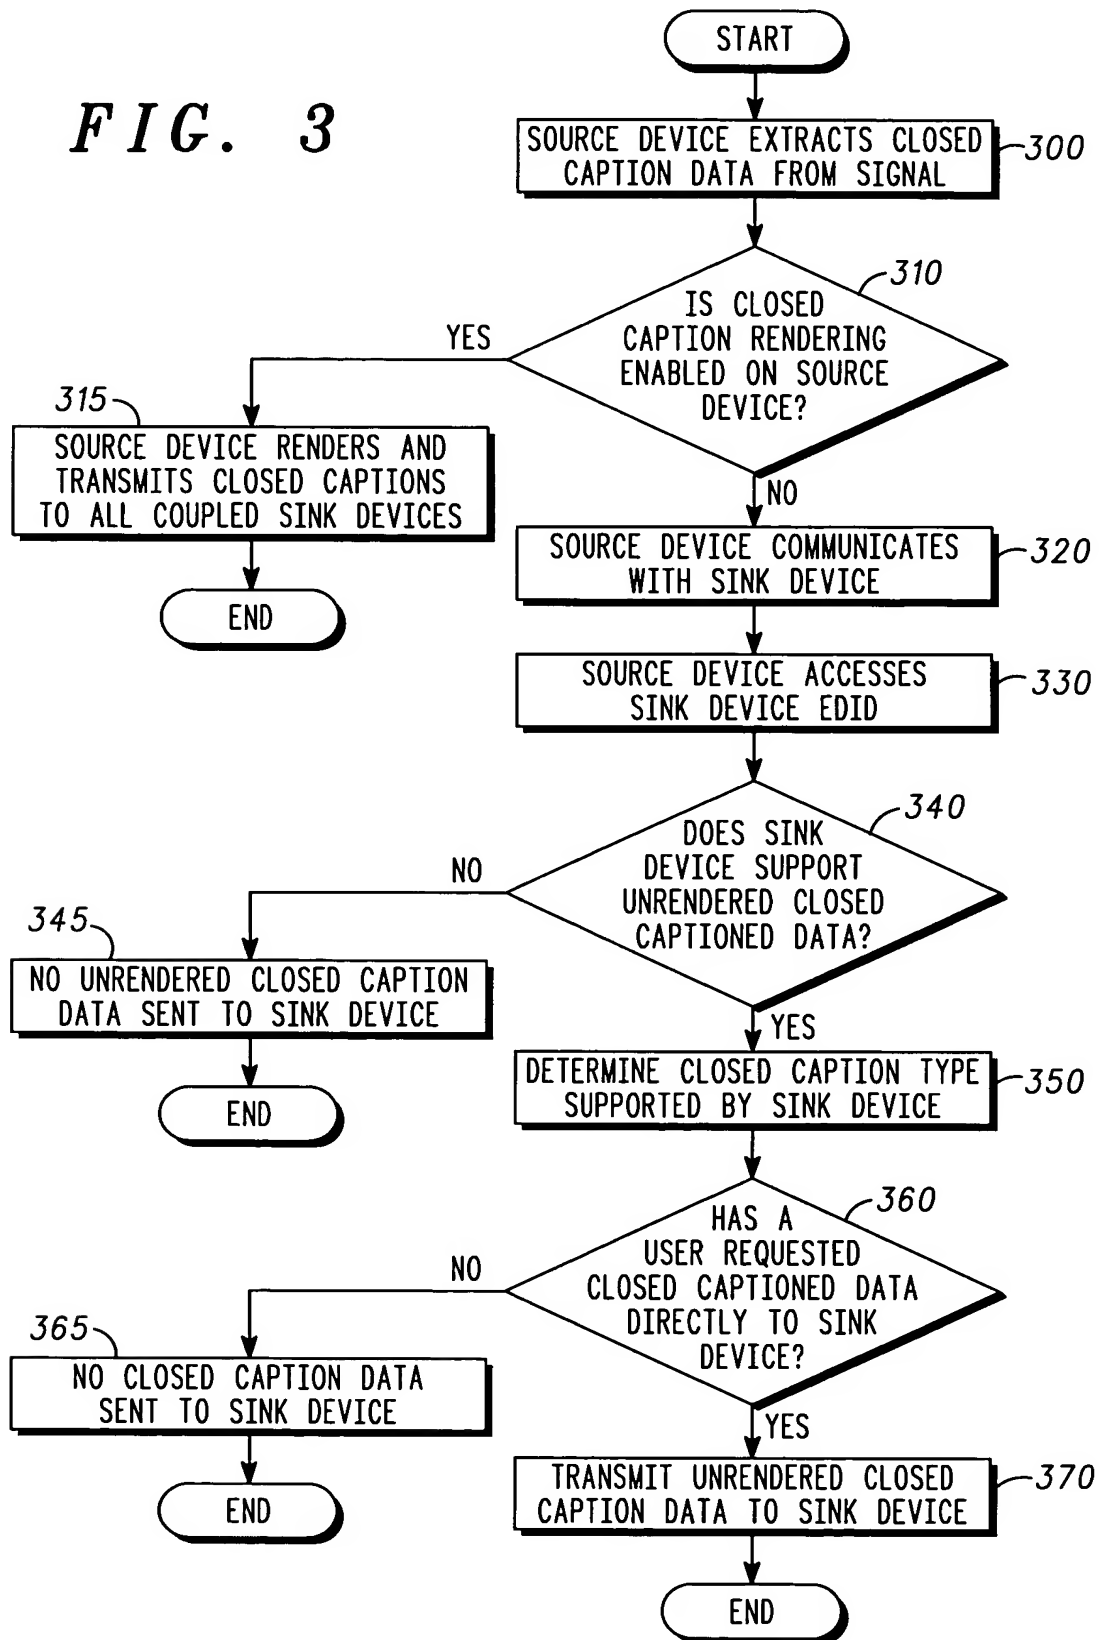

4/4

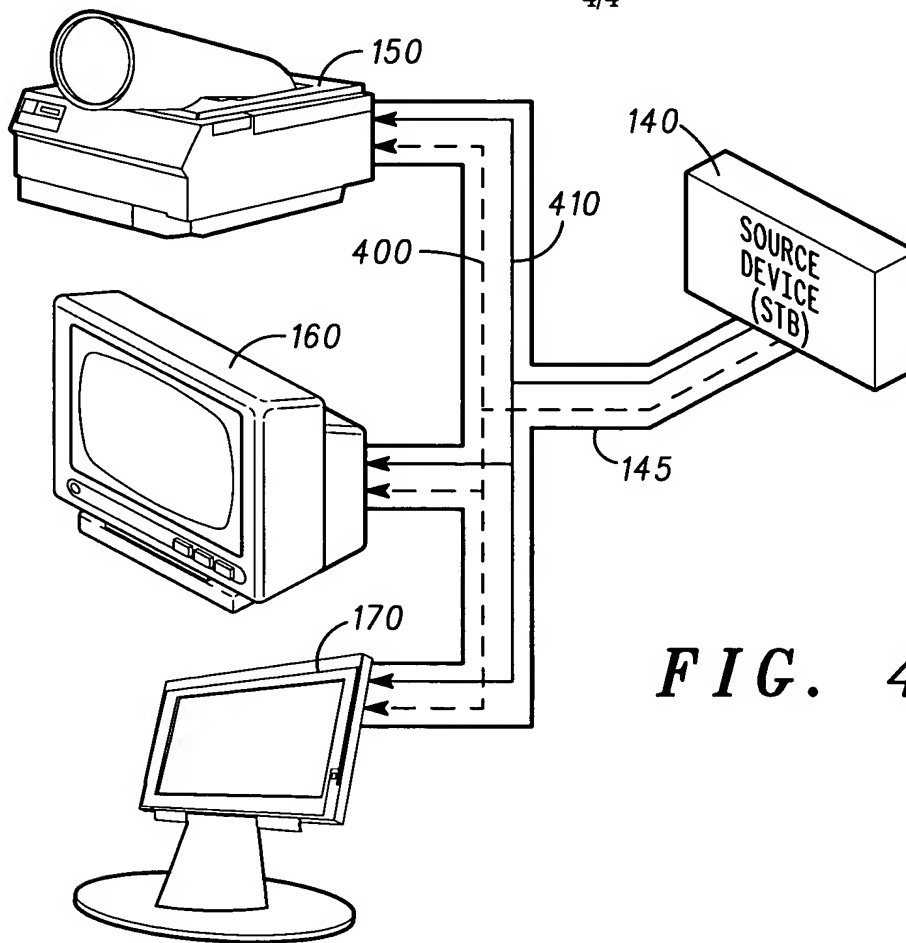

**FIG. 4**

**FIG. 5**

TOTAL NUMBER OF BYTES	BYTE	DESCRIPTOR	VALUE/DESCRIPTION																								
18	2	FLAG	FLAG=0FDFh, TO INDICATE DOWNLOAD INFORMATION BLOCK																								
	1	FLAG	<table border="1"><thead><tr><th colspan="8">BIT</th></tr><tr><th>7</th><th>6</th><th>5</th><th>4</th><th>3</th><th>2</th><th>1</th><th>0</th></tr></thead><tbody><tr><td colspan="4">RESERVED(SET TO 0000<sub>2</sub>)</td><td>RCC</td><td>CCT</td><td>608</td><td>708</td></tr></tbody></table> <p>708=DEVICE SUPPORTS 708 FORMATTED CLOSED CAPTIONING. 608=DEVICE SUPPORTS 608 FORMATTED CLOSED CAPTIONING. CCT=CLOSED CAPTIONING TRANSMITTED-SET BY THE SOURCE DEVICE. INDICATES THAT THE SOURCE DEVICE IS TRANSMITTING CLOSED CAPTIONING DATA TO THE SINK DEVICE. RCC=REQUEST CLOSED CAPTIONING-SET BY THE SINK DEVICE TO INDICATE THAT THE USER REQUESTED THAT CLOSED CAPTIONING DATA BE TRANSMITTED TO THE DEVICE.</p>	BIT								7	6	5	4	3	2	1	0	RESERVED(SET TO 0000 <sub>2</sub> )				RCC	CCT	608	708
BIT																											
7	6	5	4	3	2	1	0																				
RESERVED(SET TO 0000 <sub>2</sub> )				RCC	CCT	608	708																				
	15	FLAG	ALL BITS SET TO ZERO																								